


AC1154

Addressing unit AS-i 3.0

Bus system AS-Interface

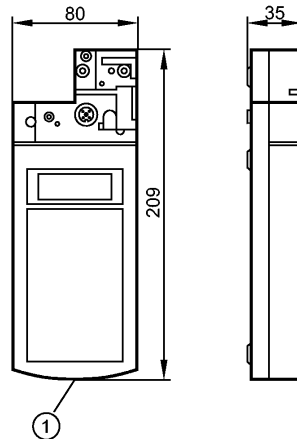

1: charging socket



Product characteristics

AS-i addressing unit

AS-i version 3.0 with extended addressing mode

Application

Application	Set-up and diagnosis
Function	<ul style="list-style-type: none"> - Addressing or programming of max. 62 slaves - Display of all the slaves on the bus - Reading and writing slave data and slave parameters - Reading of safety codes (AS-i Safety at Work) - Selection and display of the different operating modes via the MODE key - Indication of the peripheral fault flag <p>- Addressing of slaves with an optical data interface by means of a special IR adapter</p> <p>The following components can be directly connected by means of a cable:</p> <ul style="list-style-type: none"> - Active module upper parts - Intelligent sensors and actuators - Intelligent AS-i slaves

Electrical data

Supply	<ul style="list-style-type: none"> - built-in accumulator - charging time approx. 12 hours - operating time with accumulator full: 8 hours, this corresponds to approx. 250 writing/reading operations - 230 V AC charging unit supplied - protection rating IP 20
Short-circuit proof	yes
AS-i interface reverse polarity protection	yes

Mechanical data

Weight	[kg]	0.445
--------	------	-------

Accessories

Accessories (optional)	<ul style="list-style-type: none"> - addressing adapter for compact modules order no. E70423; - addressing cable order no. E70213; - IR addressing adapter order no. E70211
------------------------	--

Remarks

Pack quantity	[piece]	1
---------------	---------	---